


UMEC P/N:	DESCRIPTION	REVISION	DATE
UT20311S	ADSL INDUCTOR	A0	03/07

ELECTRICAL SPECIFICATIONS AT 25°C:

- INDUCTANCE: 4.0mH±10.0%, 1-3, 10kHz, 1.0Vac, 0~160mADC, Ls
4.0mH±15.0%, 1-3, 10kHz, 1.0Vac, Ls, 200mADC
- URNS RATIO: 1.00 : 1.00, 1-3/2-4, 10kHz, 100mVac, 1.0%
- DC RESISTANCE @25°C: 4.2 ohms max., 1-3
4.2 ohms max., 2-4
- HI-POT: 850VDC, 1-4, 1s, 500µA max.
- SRF: 250kHz min.
- OPERATING TEMP RANGE: -40° to 85°C

Dimensions:

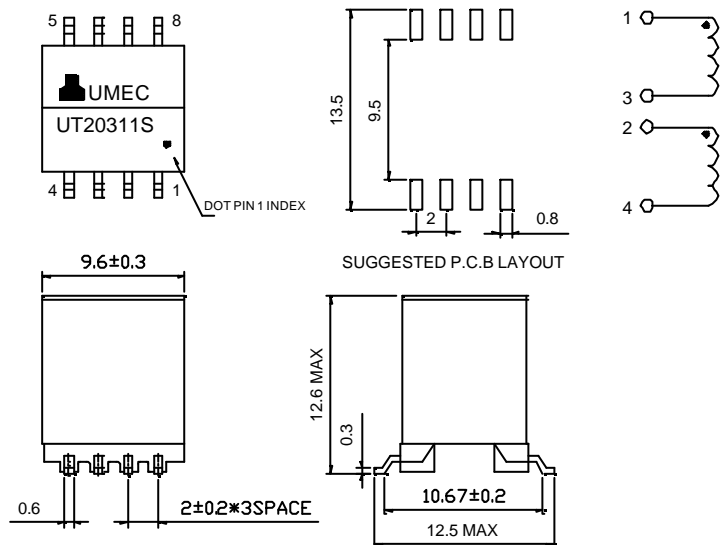

- NOTE: 1. Packaging Information-Tape And Reel According To Item No. "TKH7" of Data Sheet 01-00
2. Patent Core Type (USA patent no. 6,501,362 and Foreign)

Tolerances:±0.2mm



UMEC Europe
Universal Microelectronics

Internet: <http://www.umec.de>

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

E10-007-B

e-mail: info@umec.de