




SMT POWER INDUCTORS

- ◆ These are high power SMT inductors and superior to high saturation.
- ◆ Tape and Reel package.
- ◆ Operation Temperature : -30°C~+100°C
- ◆ (Contain Heating Coil)Over 100MŪ at 100VD.C. between coil and core.
- ◆ No dielectric breakdown at 100VD.C. for 1 minute between coil and core.

LS TYPE

CONFIGURATIONS & DIMENSIONS

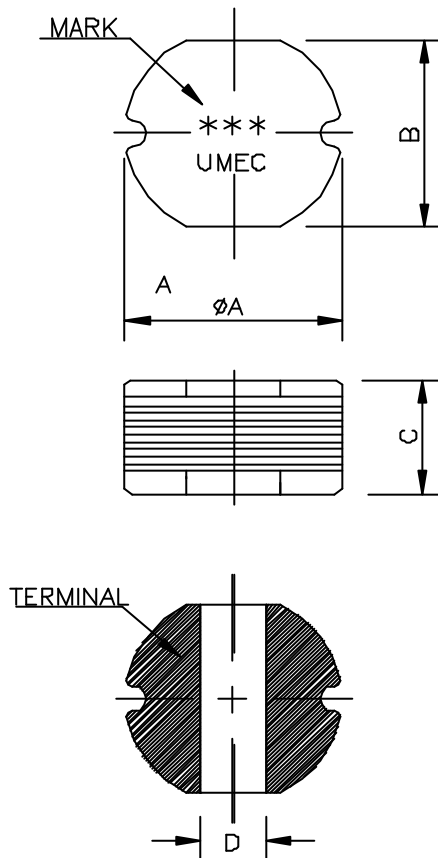

UNIT:mm

PART NAME	A	B	C	D
LS43-***	4.5±0.3	4.0±0.3	3.2±0.3	1.0 TYP.
LS54-***	5.8±0.3	5.2±0.3	4.5±0.4	1.3 TYP.
LS73-***	7.8±0.3	7.0±0.3	3.5±0.5	2.1 TYP.
LS75-***	7.8±0.3	7.0±0.3	5.0±0.5	2.1 TYP.
LS104-***	10.0±0.3	9.0±0.3	4.0±0.5	2.9 TYP.
LS105-***	10.0±0.3	9.0±0.3	5.4±0.4	2.9 TYP.

DATA SHEET 02-30 AUG./98 1/5



UMEC Europe
Universal Microelectronics

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

Internet: <http://www.umec-europe.com>
<http://www.umec-web.com>

e-mail: info@umec.de



SMT POWER INDUCTORS

ELECTRICAL SPECIFICATION @25°C:

UMEC PART NUMBER	MARK	INDUCTANCE(μ H)	D.C.R(Ω) MAX.	RATING CURRENT(A)
LS43 TYPE				
LS43-1R0	1R0	1.0 \pm 20%	0.049	2.56
LS43-1R4	1R4	1.4 \pm 20%	0.056	2.52
LS43-1R8	1R8	1.8 \pm 20%	0.064	1.95
LS43-2R2	2R2	2.2 \pm 20%	0.071	1.75
LS43-2R7	2R7	2.7 \pm 20%	0.079	1.58
LS43-3R3	3R3	3.3 \pm 20%	0.086	1.44
LS43-3R9	3R9	3.9 \pm 20%	0.094	1.33
LS43-4R7	4R7	4.7 \pm 20%	0.11	1.15
LS43-5R6	5R6	5.6 \pm 20%	0.13	0.99
LS43-6R8	6R8	6.8 \pm 20%	0.13	0.95
LS43-8R2	8R2	8.2 \pm 20%	0.15	0.84
LS43-100	100	10 \pm 20%	0.18	1.04
LS43-120	120	12 \pm 20%	0.21	0.97
LS43-150	150	15 \pm 20%	0.24	0.85
LS43-180	180	18 \pm 20%	0.34	0.74
LS43-220	220	22 \pm 20%	0.38	0.68
LS43-270	270	27 \pm 20%	0.52	0.62
LS43-330	330	33 \pm 10%	0.54	0.56
LS43-390	390	39 \pm 10%	0.59	0.52
LS43-470	470	47 \pm 10%	0.84	0.44
LS43-560	560	56 \pm 10%	0.94	0.42
LS43-680	680	68 \pm 10%	1.12	0.37
LS54 TYPE				
LS54-100	100	10 \pm 20%	0.10	1.44
LS54-120	120	12 \pm 20%	0.12	1.40
LS54-150	150	15 \pm 20%	0.14	1.30
LS54-180	180	18 \pm 20%	0.15	1.23
LS54-220	220	22 \pm 20%	0.18	1.11
LS54-270	270	27 \pm 20%	0.20	0.97
LS54-330	330	33 \pm 15%	0.23	0.88
LS54-390	390	39 \pm 15%	0.32	0.80
LS54-470	470	47 \pm 15%	0.37	0.72
LS54-560	560	56 \pm 10%	0.42	0.68
LS54-680	680	68 \pm 10%	0.46	0.61
LS54-820	820	82 \pm 10%	0.60	0.58
LS54-101	101	100 \pm 10%	0.70	0.52
LS54-121	121	120 \pm 10%	0.93	0.48
LS54-151	151	150 \pm 10%	1.10	0.40
LS54-181	181	180 \pm 10%	1.38	0.38
LS54-221	221	220 \pm 10%	1.57	0.35

*INDUCTANCE & RATING CURRENT

Measuring Frequency: 1.0uH 8.2uH(7.96MHz), 10uH 82uH(2.52MHz) ;100uH 820uH(1KHz)

*The inductance is 10% lower then its initial value at rating DC current when at t=40 whichever is lower.

(hp 4284A Precision LCR METER & hp 4192A LF IMPEDANCE ANALYZER & hp 42841A BIAS CURRENT SOURCE)

*D.C.Resistance (hp 34401A MULTIMETER)

DATA SHEET 02-30 AUG./98 2/5



UMEC Europe
Universal Microelectronics

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

Internet: <http://www.umec-europe.com>

e-mail: info@umec.de

<http://www.umec-web.com>



SMT POWER INDUCTORS

ELECTRICAL SPECIFICATION @25°C

UMEC PART NUMBER	MARK	INDUCTANCE(uH)	D.C.R(Ω) MAX.	RATING CURRENT(A)
LS73 TYPE				
LS73-100	100	10±20%	0.080	1.44
LS73-120	120	12±20%	0.089	1.39
LS73-150	150	15±20%	0.104	1.24
LS73-180	180	18±20%	0.111	1.12
LS73-220	220	22±20%	0.129	1.07
LS73-270	270	27±20%	0.153	0.94
LS73-330	330	33±20%	0.170	0.85
LS73-390	390	39±20%	0.217	0.74
LS73-470	470	47±20%	0.252	0.68
LS73-560	560	56±10%	0.282	0.64
LS73-680	680	68±10%	0.332	0.59
LS73-820	820	82±10%	0.406	0.54
LS73-101	101	100±10%	0.481	0.51
LS73-121	121	120±10%	0.536	0.49
LS73-151	151	150±10%	0.755	0.40
LS73-181	181	180±10%	1.022	0.36
LS73-221	221	220±10%	1.200	0.31
LS73-271	271	270±10%	1.306	0.29
LS73-331	331	330±10%	1.495	0.28
LS75 TYPE				
LS75-100	100	10±10%	0.07	2.30
LS75-120	120	12±10%	0.08	2.00
LS75-150	150	15±10%	0.09	1.80
LS75-180	180	18±10%	0.10	1.60
LS75-220	220	22±10%	0.11	1.50
LS75-270	270	27±10%	0.12	1.30
LS75-330	330	33±10%	0.13	1.20
LS75-390	390	39±10%	0.16	1.10
LS75-470	470	47±10%	0.18	1.10
LS75-560	560	56±10%	0.24	0.94
LS75-680	680	68±10%	0.28	0.85
LS75-820	820	82±10%	0.37	0.78
LS75-101	101	100±10%	0.43	0.72
LS75-121	121	120±10%	0.47	0.66
LS75-151	151	150±10%	0.64	0.58
LS75-181	181	180±10%	0.71	0.51
LS75-221	221	220±10%	0.96	0.49
LS75-271	271	270±10%	1.11	0.42
LS75-331	331	330±10%	1.26	0.40
LS75-391	391	390±10%	1.77	0.36
LS75-471	471	470±10%	1.96	0.34

***INDUCTANCE & RATING CURRENT**

Measuring Frequency: 1.0uH 8.2uH(7.96MHz), 10uH 82uH(2.52MHz) 100uH 820uH(1KHz)

*The inductance is 10% lower then its initial value at rating DC current when at

t=40 whichever is lower. (hp 4284A Precision LCR METER & hp 4192A LF IMPEDANCE ANALYZER & hp 42841A BIAS CURRENT SOURCE)

*D.C.Resistance (hp 34401A MULTIMETER)

DATA SHEET 02-30 AUG./98 3/5



UMEC Europe
Universal Microelectronics

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

Internet: <http://www.umec-europe.com>

<http://www.umec-web.com>

e-mail: info@umec.de



SMT POWER INDUCTORS

ELECTRICAL SPECIFICATION @25°C:

UMEC PART NUMBER	MARK	INDUCTANCE(uH)	D.C.R(\bar{U}) MAX.	RATING CURRENT(A)
LS104 TYPE				
LS104-100	100	10±20%	0.053	2.38
LS104-120	120	12±20%	0.061	2.13
LS104-150	150	15±20%	0.070	1.87
LS104-180	180	18±20%	0.081	1.73
LS104-220	220	22±20%	0.088	1.60
LS104-270	270	27±20%	0.100	1.44
LS104-330	330	33±20%	0.120	1.26
LS104-390	390	39±20%	0.151	1.20
LS104-470	470	47±20%	0.170	1.10
LS104-560	560	56±10%	0.199	1.01
LS104-680	680	68±10%	0.223	0.91
LS104-820	820	82±10%	0.252	0.85
LS104-101	101	100±10%	0.344	0.74
LS104-121	121	120±10%	0.396	0.69
LS104-151	151	150±10%	0.544	0.61
LS104-181	181	180±10%	0.621	0.56
LS104-221	221	220±10%	0.721	0.53
LS104-271	271	270±10%	0.949	0.45
LS104-331	331	330±10%	1.100	0.42
LS104-391	391	390±10%	1.245	0.38
LS104-471	471	470±10%	1.526	0.35
LS104-561	561	560±10%	1.904	0.32

***INDUCTANCE & RATING CURRENT**

Measuring Frequency: 1.0uH 8.2uH(7.96MHz), 10uH 82uH(2.52MHz)
100uH 820uH(1KHz)

*The inductance is 10% lower then its initial value at rating DC current when at t=40 whichever is lower.

(hp 4284A Precision LCR METER & hp 4192A LF IMPEDANCE ANALYZER & hp 42841A BIAS CURRENT SOURCE)

*D.C.Resistance (hp 34401A MULTIMETER)

DATA SHEET 02-30 AUG./98
4 OF 5



UMEC Europe
Universal Microelectronics

Internet: <http://www.umec-europe.com>
<http://www.umec-web.com>

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

e-mail: info@umec.de



SMT POWER INDUCTORS

ELECTRICAL SPECIFICATION @25°C

UMEC PART NUMBER	MARK	INDUCTANCE(uH)	D.C.R(Ω) MAX.	RATING CURRENT(A)
LS105 TYPE				
LS105-100	100	10±20%	0.06	2.60
LS105-120	120	12±20%	0.07	2.45
LS105-150	150	15±20%	0.08	2.27
LS105-180	180	18±20%	0.09	2.15
LS105-220	220	22±20%	0.10	1.95
LS105-270	270	27±20%	0.11	1.76
LS105-330	330	33±20%	0.12	1.50
LS105-390	390	39±20%	0.14	1.37
LS105-470	470	47±10%	0.17	1.28
LS105-560	560	56±10%	0.19	1.17
LS105-680	680	68±10%	0.22	1.11
LS105-820	820	82±10%	0.25	1.00
LS105-101	101	100±10%	0.35	0.97
LS105-121	121	120±10%	0.40	0.89
LS105-151	151	150±10%	0.47	0.78
LS105-181	181	180±10%	0.63	0.72
LS105-221	221	220±10%	0.73	0.66
LS105-271	271	270±10%	0.97	0.57
LS105-331	331	330±10%	1.15	0.52
LS105-391	391	390±10%	1.30	0.48
LS105-471	471	470±10%	1.48	0.42
LS105-561	561	560±10%	1.90	0.33
LS105-681	681	680±10%	2.25	0.28
LS105-821	821	820±10%	2.55	0.24

*INDUCTANCE & RATING CURRENT

Measuring Frequency: 1.0uH 8.2uH(7.96MHz), 10uH 82uH(2.52MHz)
100uH 820uH(1KHz)

*The inductance is 10% lower then its initial value at rating DC current when at t=40 whichever is lower.

(hp 4284A Precision LCR METER & hp 4192A LF IMPEDANCE ANALYZER & hp 42841A BIAS CURRENT SOURCE)

*D.C.Resistance (hp 34401A MULTIMETER)

DATA SHEET 02-30 AUG./98
5 OF 5



UMEC Europe
Universal Microelectronics

Internet: <http://www.umec-europe.com>
<http://www.umec-web.com>

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 • D-74076 Heilbronn
Tel. 07131/76170 • Fax 07131/761720

e-mail: info@umec.de