DATA SHEET

UM PART NO.:	SPECIFICATIONS	REV.	1/1
UT23029	T1/E1/CEPT/ISDN-PRI TRANSFORMERS	A0	2000/11

ELECTRICAL SPECIFICATIONS AT 25 ^{0}C :

1. XMIT TURNS RATIO :1:2.4±2% AT 15.75KHz 1Vrms.,
   RCV TURNS RATIO : 1:1±2% AT 15.75KHz 1Vrms.,
2. PRI. INDUCTANCE : 1.5 mH min. AT 10KHz 20mVrms.
3. INTERWINDING CAPACITANCE : 35 pF max. AT 100KHz 1Vrms.
4. LEAKAGE INDUCTANCE : 0.5 uH max. AT 100KHz 1Vrms.
5. DC RESISTANCE : 0.8 Ω max., XMIT & RCV
6. HI-POT : 1500Vrms/2SEC. LEAKAGE CURRENT 0.5mA Max. PRI. TO SEC.
7. PRI. PINS : XMIT (1-2),(8-9),(11-12),(18-19)
   RCV (24-25),(27-28),(34-35),(37-38)

DIMENSIONS & SCHEMATICS:

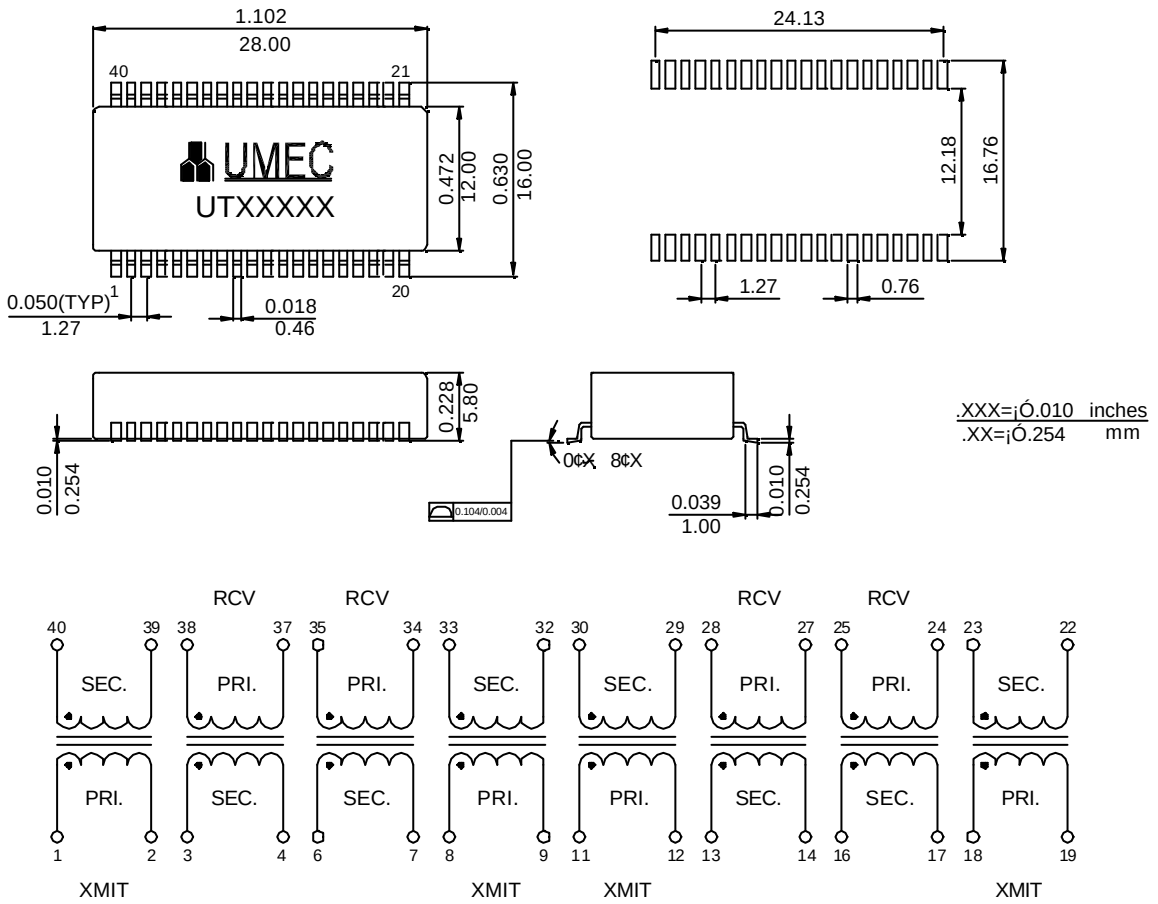

Note: Specifications are subject to change without prior notice.

UMEC GmbH
Universal Microelectronics

UMEC elektronische Komponenten GmbH
Kreuzenstraße 80 ● D-74076 Heilbronn
Tel. 07131/76170 ● Fax 07131/761720

Internet: www.umec-europe.com
www.umec-web.net

e-mail: info@umec.de